

FIG. 1

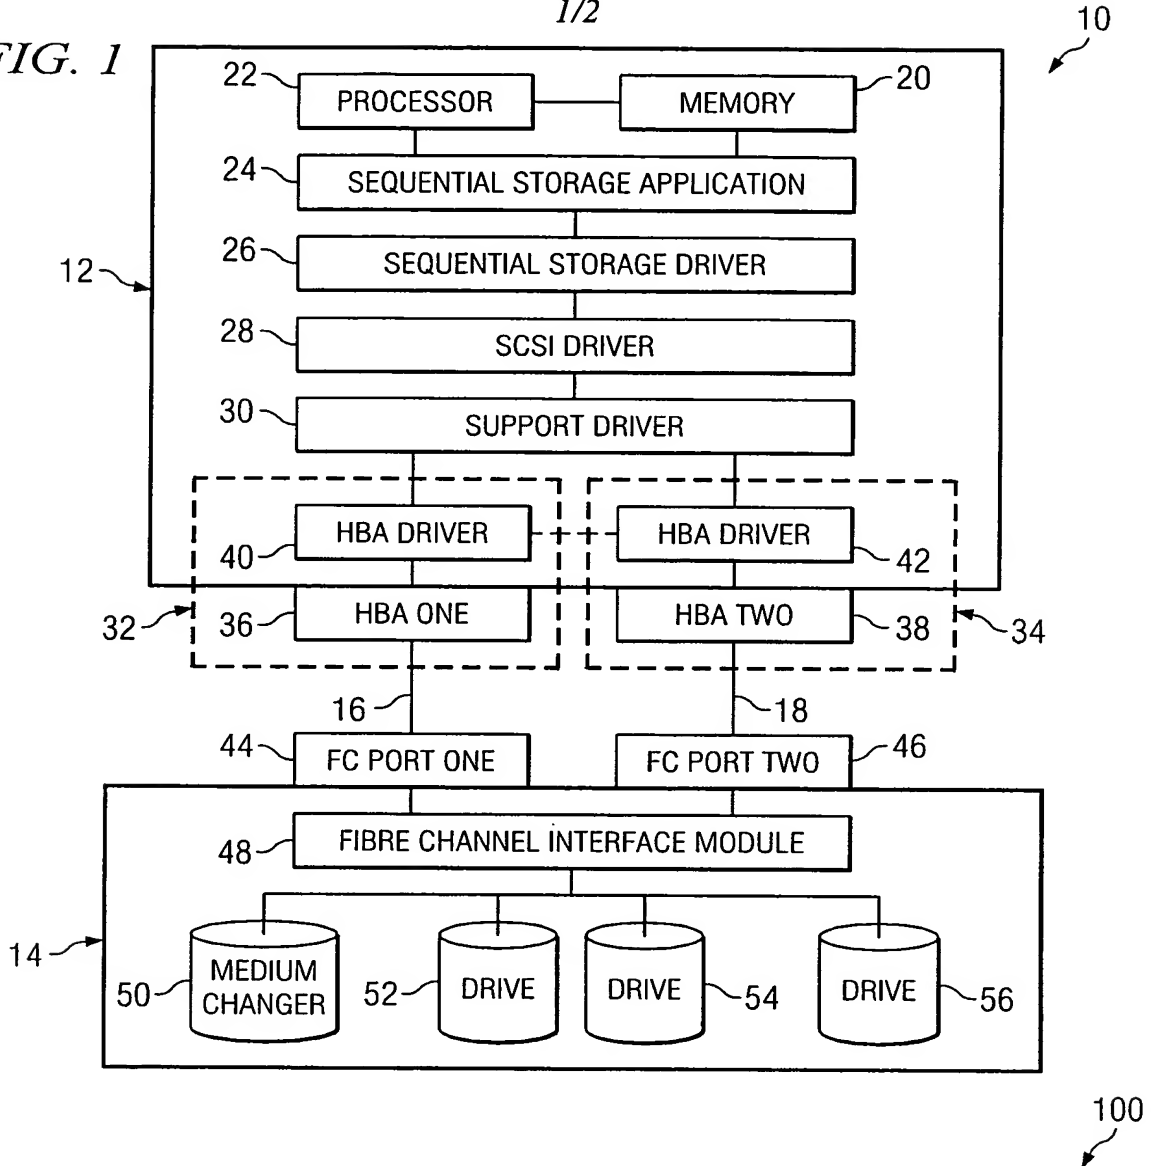


FIG. 3

BITS/WORDS	BITS 31-24	BITS 23-16	BITS 15-8	BITS 7-0
0	104 COMMAND IDENTIFIER			
1	ORIGINATOR EXCHANGE ID (OX_ID)		RECEIVER EXCHANGE ID (RX_ID)	
2	SEQUENCE RESTART OFFSET			
3	ROUTING CONTROL	110 RESERVED		
4	PORT ID OF INITIATOR (S_ID)			UNUSED

